

# THEOBEN A.W.T. BSA AIR RIFLES

Goldstar - Lightning - Meteor - Supersport - Superstar

Tools required to carry out conversion:


- Slotted Dowel (as per diagram below)
- Medium slot head Screwdriver
- Medium Phillips Screwdriver
- Spring compressor

**HELPLINE**  
**01234 391429**

1. Remove spring, guide, plastic sleeve and any washers from rear of gun. Check that no washers are stuck inside piston.
2. Place gas spring into piston with rod to the rear. If spring is a tight fit in piston, a light twisting motion will ease fitment.
3. Compress spring with aid of slotted dowel and replace cross pin.
4. Insert block, tighten block securing screw.
5. Replace end finishing cap and refit stock.

There are no detrimental effects from prolonged cocking.

**Available for;**  
Goldstar  
Lightning  
Meteor  
Supersport  
Superstar

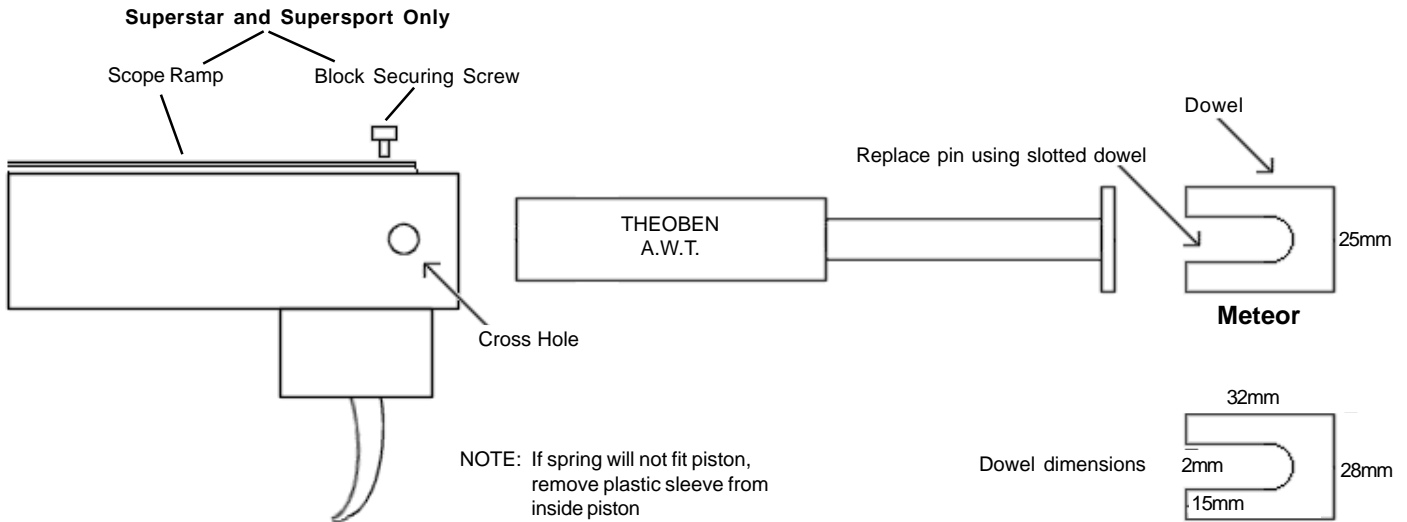

Gas Spring is guaranteed for 6 months from date of purchase.  
No responsibility can be accepted for any damage caused by misfitting of gas spring.

Patent Warning Notice for Gas Strut

This Gas Strut Spring Kit is protected by the following patents; UK 2.084.704      USA 4.707.686 Belgium 897.043  
Further patents pending.

